
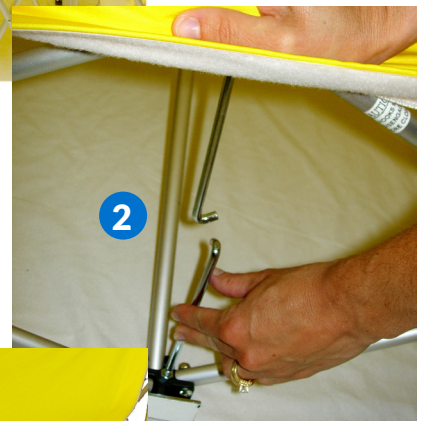
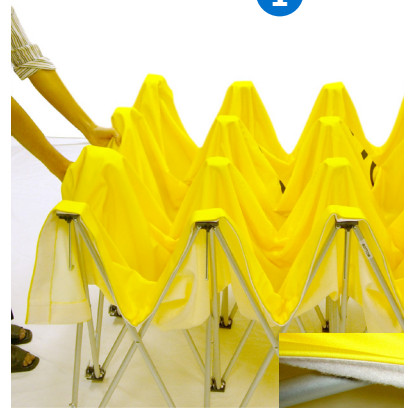


V-Burst™ Backlit

Set-up Instructions

Basic Assembly

- 1) Spread collapsed display out in all four directions - fabric graphic facing up
- 2) Connect adjoining J-hooks around perimeter of display
- 3) Stand display up and connect remaining center J-hooks from behind
- 4) Install the Radiance lights in the bottom and then attach the unprinted backer (see other side for details)
- 5) Attach Velcro from front graphic onto the sides of the unprinted backer
- 6) To break down, repeat steps in reverse
Note: make sure all J-hooks are disengaged before collapsing display

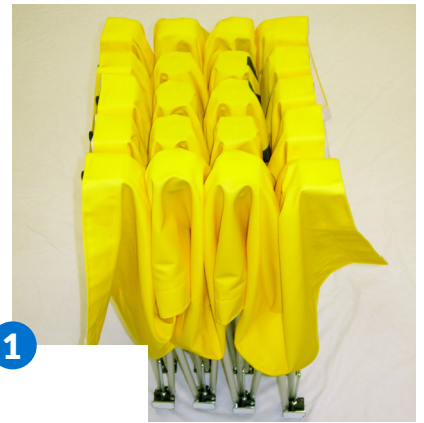




Radiance Lighting Set-Up

- 1) After frame is assembled, position light mounting brackets into place on the bottom frame quad scissors.

Note: the brackets are notched specifically to create a level platform for light placement and may need to be rotated to fit different frame systems.

- 2) Place Radiance lights into the mounting brackets and connect the wires and power supply.

Note: certain frame sizes will have multiple power supplies.

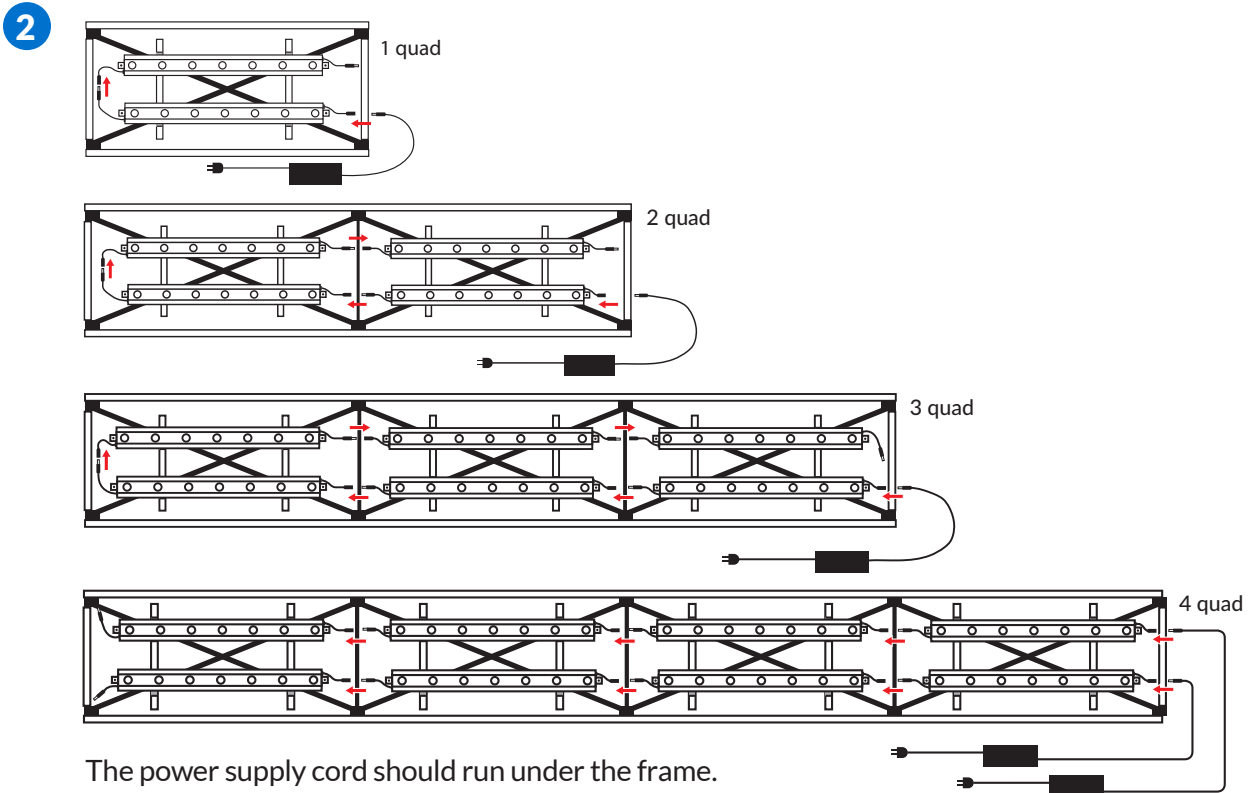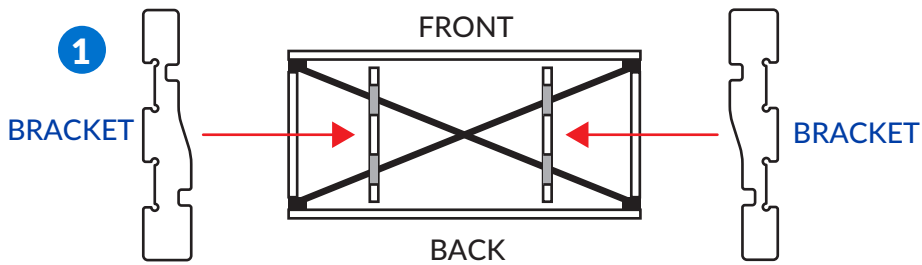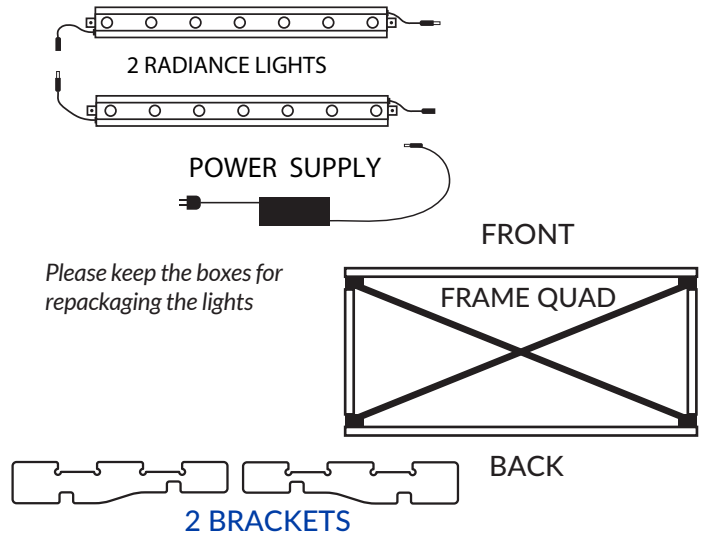

The power supply cord should run under the frame.



Great Quality Meets Great Prices
Our new line-up of quick-ship products is here.