


Item	Qty.	Description
1	1	38.0535”h Curved Vertical w/ A10
2	1	38.0535”h Curved Vertical
3	1	38.0535”h Curved Vertical
4	1	38.0535”h Curved Vertical
5/5A	2/2	17”w Z45 Horizontal Extrusion
6/6A	2/2	17”w Z45 Horizontal Extrusion
7	1	16.5120”w Z33 Horizontal w/ Door Hinges
8	1	30”h S44 Vertical Extrusion

**Steps:**




- 1) Connect horizontals [5] between verticals [2&3] & [1&4].
- 2) Insert Side Infills between verticals and in center groove of horizontals [5].
- 3) Secure Infills with horizontals [5A].
- 4) Assemble Counter Top and vertical [8] together.  
Use bolt to attach from underside of counter top.
- 5) Insert Interior Shelf into assembled kisok body.
- 6) Attach counter top assembly to assembled kisok. See **Counter Top Attachment** detail.
- 7) Attach door to hinges located on horizontal [7]. See **Door Attachment** detail.
- 8) Install Monitor Mount to vertical [8]. See **Monitor Mount Attachment** detail.
- 9) Connect graphic wing to A10 Clamps located on vertical [1].

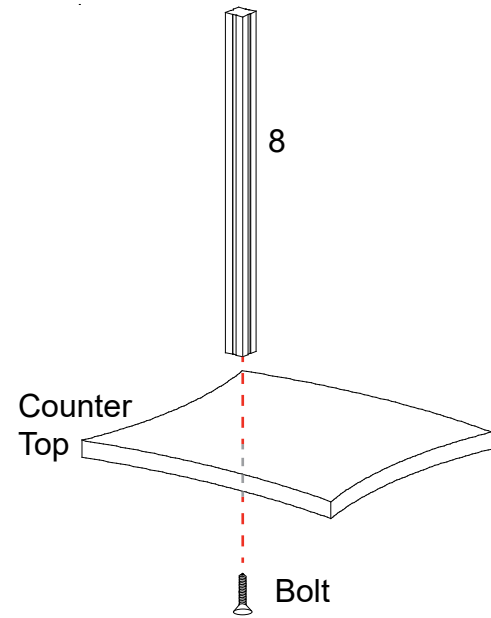

**A10 Clamp Detail**

Tighten set screw to secure A10 to extrusion.

Tighten knob to secure header/wing in place.

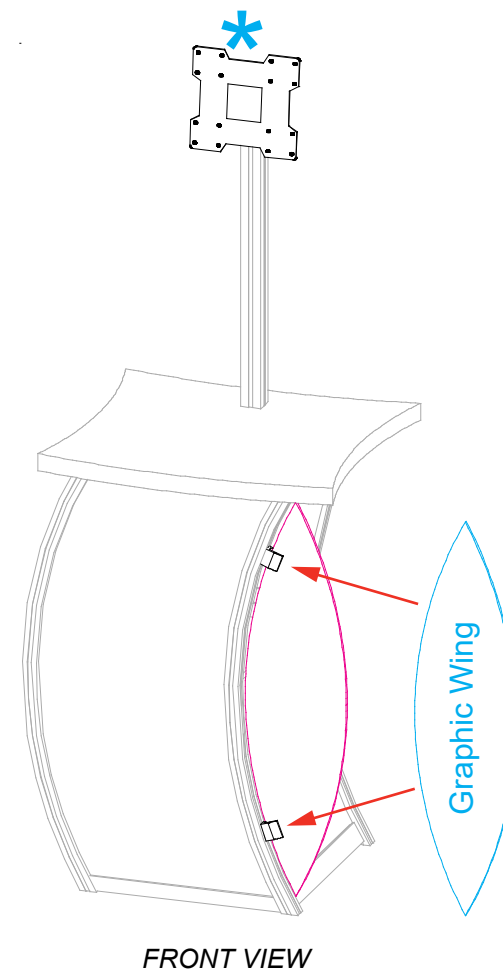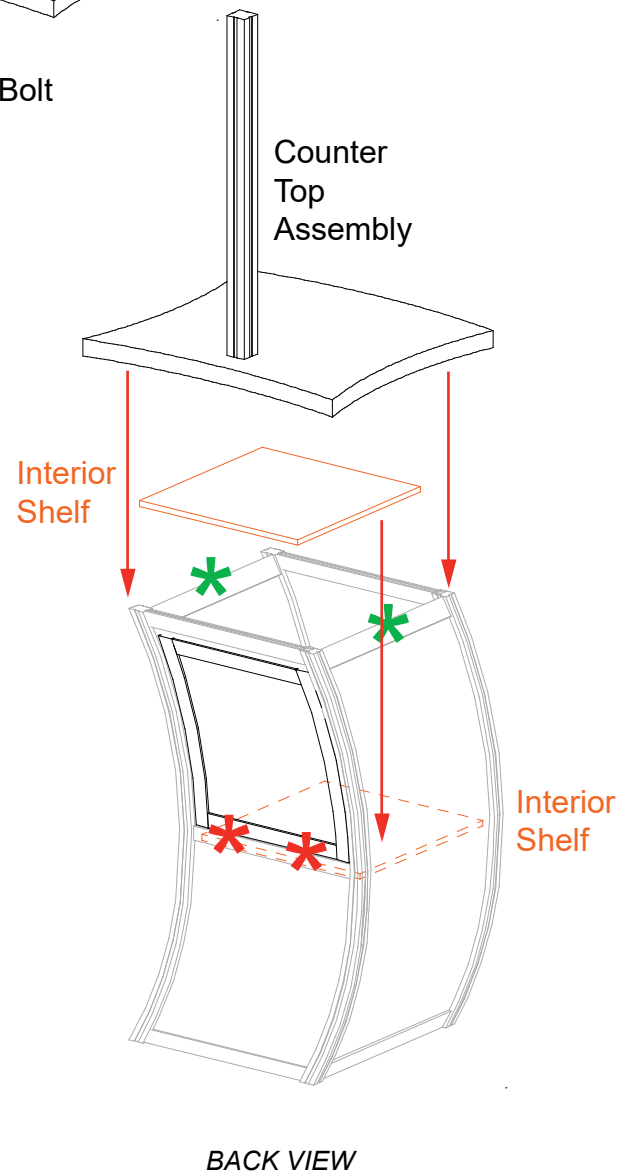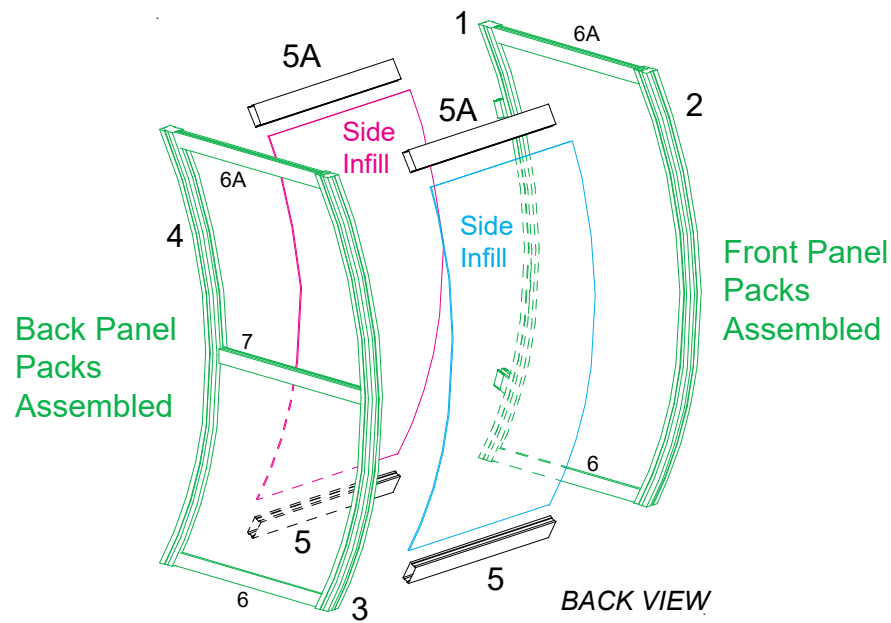

**\* Monitor Mount Attachment**

Slide V4 Connectors into groove of Extrusion. Tighten Set Screws to secure connectors in place.

Attach Monitor Mount back piece to Extrusion, using bolts.

Then slide monitor mount into back piece.

**\* Door Attachment**

Slide pin into hinge attached to vertical. Slide door hinge over pin.

**\* Counter Top Attachment**

# SETUP INSTRUCTIONS

## General Setup Instructions


- Read entire setup instruction manual prior to unpacking parts and pieces.
- The setup instructions are created specifically for this configuration.
- Setup instructions are laid out sequentially in steps, including exploded views with detailed explanation for assembly.

## Cleaning & Packing


- For Cleaning Metal, Plex, & Laminate Parts: Use a **MILD NON-ABRASIVE** cleanser and soft cloth/paper towel to clean all surfaces.
- Keep exhibit components away from heat and prolonged sun exposure. **Heat and UV exposure will warp and fade components.**
- Retain all provided Packing Materials. All provided packing materials are for ease of repacking & component protection.

## Disassembly


- For loss prevention, tighten all set screws and locks during disassembly.

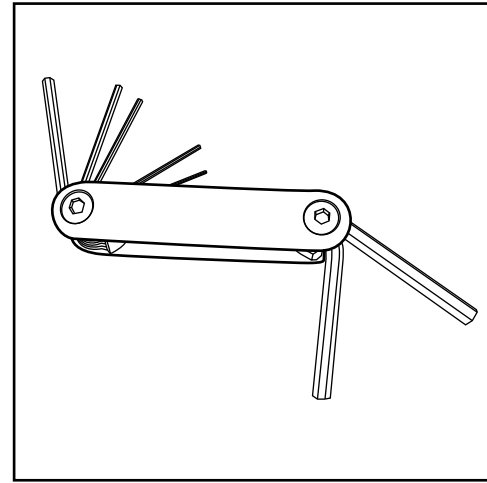


Hex Tool - Essential for Assembly

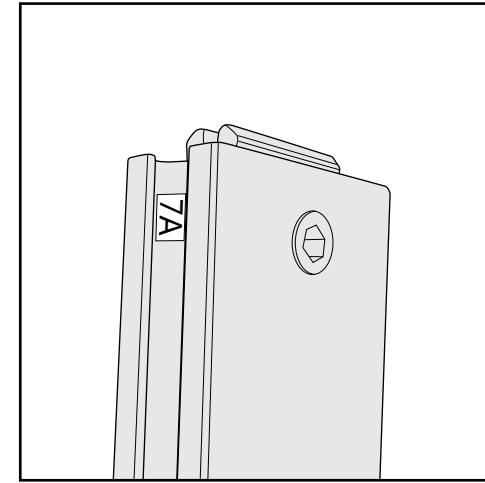


Part Identification - Numbering

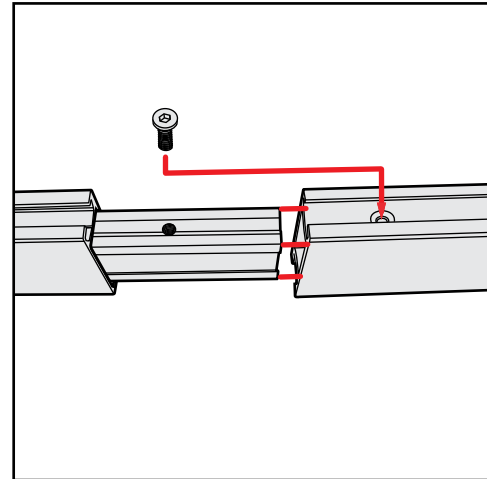


Spline Connection

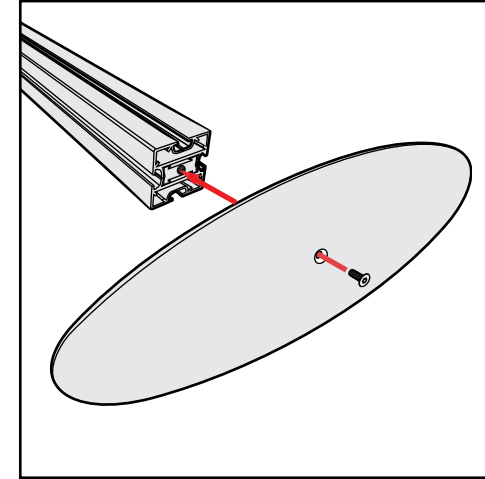

Base Plate & Extrusion Connection

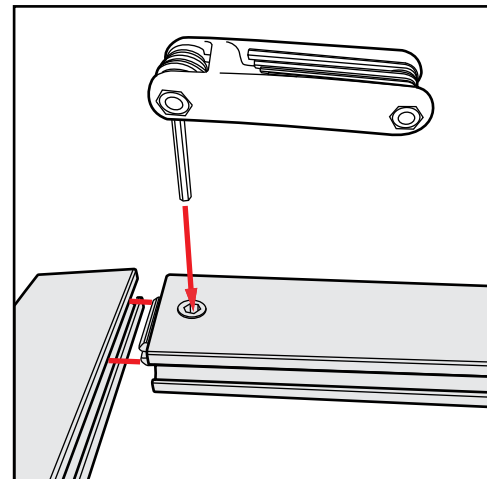


Extrusion & Lock Connection

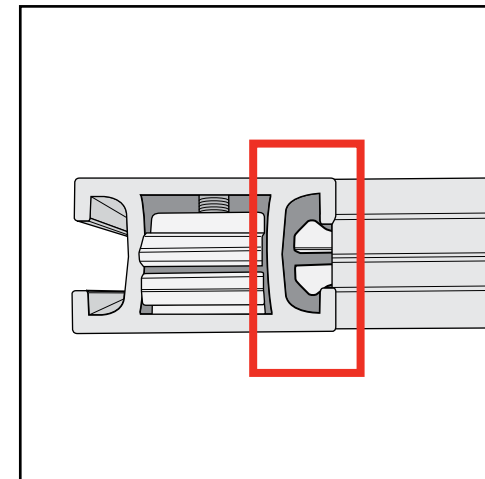


Engaged Lock



**WARNING**



DO NOT USE POWER TOOLS




LADDERS OR LIFTS  
MAY BE REQUIRED




ALL CONNECTIONS MUST  
BE TIGHTLY SECURED


### Top View of Each Level

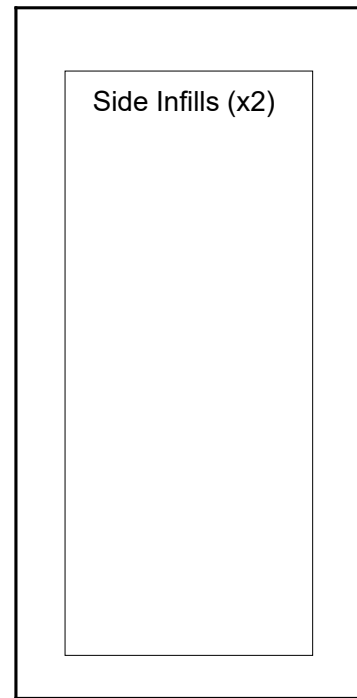


Level 1  
(Bottom level)

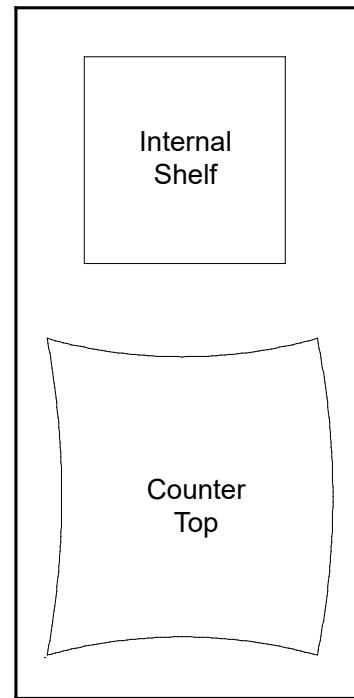


Level 2

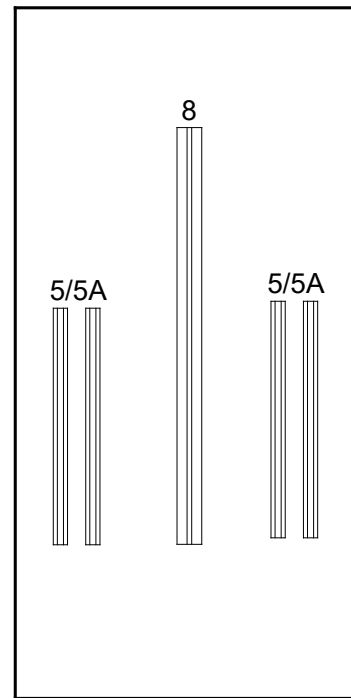

Level 3

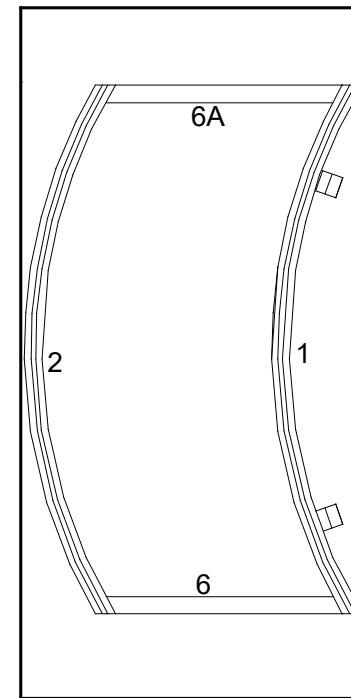

Level 4

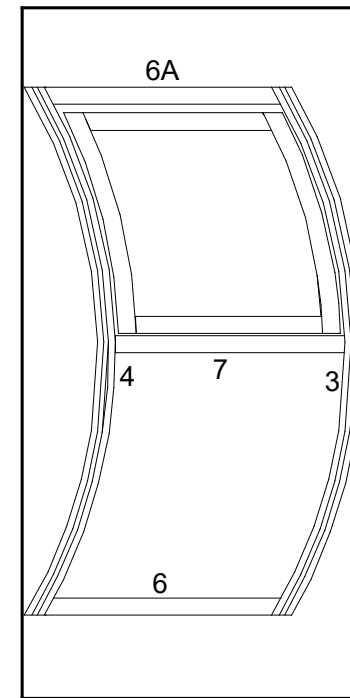

Level 5

